



## PCO TANKS

A multi-purpose tank, the PCO is well suited for nursery, agricultural and lawn care applications. These tanks feature self-supporting legs and do not require any saddles or steel supports. Flat spots are molded into both ends to provide mounting areas for agitation equipment.

Gallon Capacity	Premium Wgt Part No. White	Width	Height	Length	Fill Opening	Stainless Steel Straps
∞ 50	40664	19"	20"	38"	8"	40664S-(2)
100	40668	30"	26"	38"	8"	40668S-(2)
150	40669	36"	26"	48"	8"	40669S-(2)
200	41413	36"	35"	48"	8"	62342S-(2)
300*	47258	36 1/2"	35"	69"	16"	47258S-(3)

∞ Within UPS dimensional limits. \*300 PCO Tank has stainless steel baffle.

## SPOT SPRAYER TANKS

The spot sprayers feature threaded inserts on the bottom of the tank for mounting purposes, on one side for wand/gun placement and on the top for a 12 volt pump.

Gallon Capacity	Part No.	Width	Height/Length	Fill Opening	Outlet/Drain Specification
∞ 14	45115	14"	11"/31"	5"	—
∞ 25	62080	18"	16"/36"	5"	—

∞ Within UPS dimensional limits.

## INDUCTOR TANKS

The inductor tanks are suitable for mixing chemicals when filling a tank and are available in three sizes.

Gallon Capacity	Part No.	Diameter	Height/Length	Fill Opening	Outlet/Drain Specification
∞ 15	IN 0015-19	19"	21"	12"	2"
∞ 30	IN 0030-24	24"	26"	12"	2"

∞ Within UPS dimensional limits.



PCO Tank

15 Gallon Inductor Tank Stand Sold Separately

14 & 25 Gallon Spot Sprayer

## WATER TANK

6 gallon polyethylene tank has convenient mounting lugs molded in for easy installation and two 1/2" NPT fittings and 2" lid. Wash hose and fittings can be ordered separately.



Part No.	W	H	L	Lid
SP0006-2P	12"	8"	15"	2"
SP0006-5N	12"	8"	15"	5"

Tank with 5" lid does not include fittings. Use bulkhead fittings as shown below.

## SAFETY WATER TANK

**#SP0005-RT** 5 gallon polyethylene tank with 5" threaded lid makes an ideal hand wash tank. Accessories listed below.

**#60401** 3/4" Bulkhead fitting

**#1600-5100** Flow Rite faucet, 3/4"


**#SP5-T (low)** Stainless steel mounting tray secures your wash tank but is easy to take off for rinsing and filling

**#SP5-TR (high)** – *Shown* –



## HYPRO JET AGITATOR AND VOLUME BOOSTER

Increases effective output flow up to 4 times the input for thorough agitation.

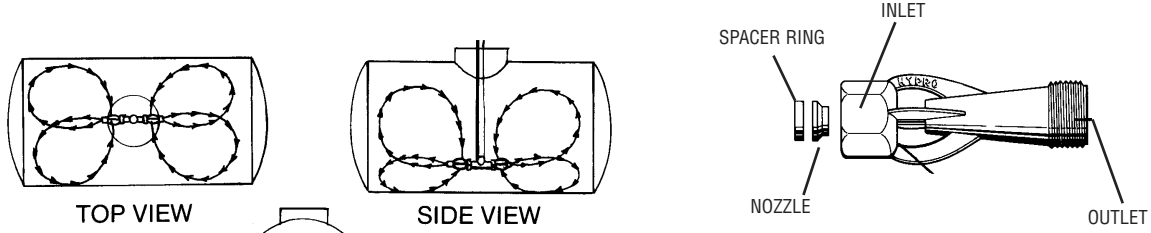


Two models available:  
 Standard, 1/2" Inlet #3371-0000  
 High Volume, 3/4" Inlet #3371-0028  
 For agitation use, agitator must be rigidly installed to mounting pipe.

Includes 3 interchangeable nozzles to permit maximum agitation with any system.

## RECTANGULAR TANKS



Small polyethylene tanks are available in a variety of shapes and sizes. The models shown here have proven to be our most popular and functional tanks, but many more are available. Please call for assistance in finding the perfect tank for your application.

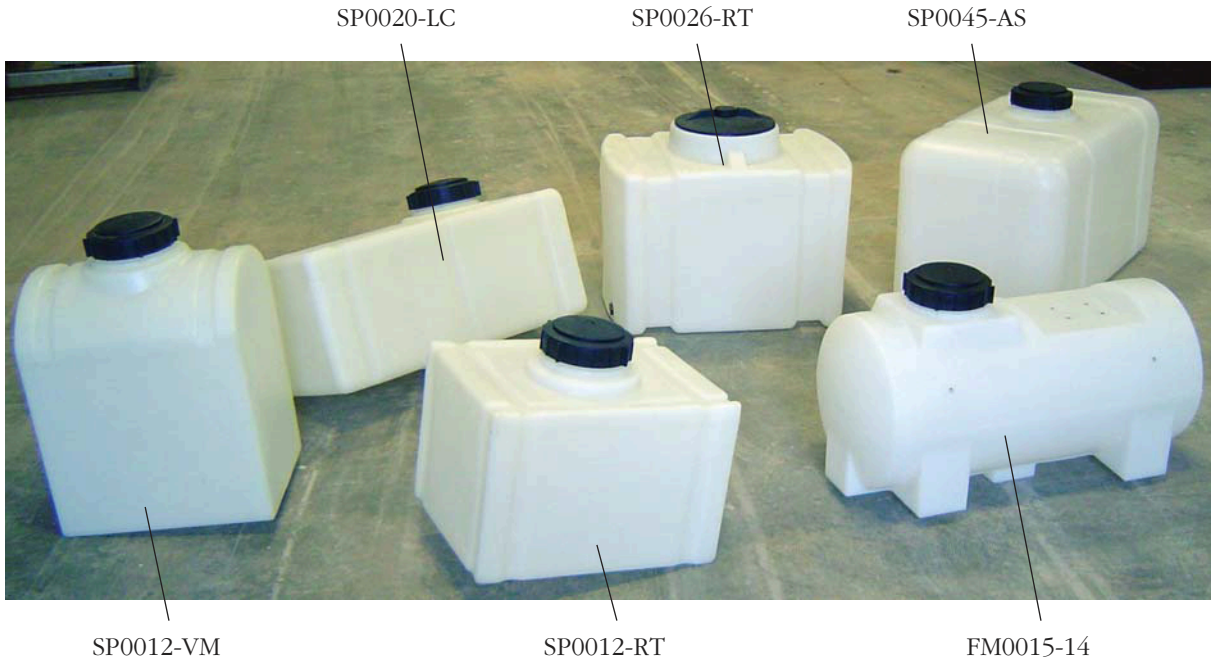

GALLONS /TYPE	PART NUMBER	OVERALL HEIGHT	TANK HEIGHT	LENGTH	WIDTH	LID SIZE	OUTLET SIZE AND TYPE	NOTES
12 gallon loaf tank	SP0012-VM	24"	19"	16 1/2"	12"	5"	3/4" FNPT molded in bottom	tapered bottom, also available in 8 gallon + 19 gallon
12 gallon rectangle	SP0012-RT	17"	12"	18"	14"	5"	3/4" FNPT bulkhead	sump in bottom center
20 gallon rectangle	SP0020-LC	17"	12"	28"	14"	5"	3/4" FNPT bulkhead	sump in bottom center
26 gallon rectangle	SP0026-RT	21"	16 1/2"	24"	17 1/2"	8"	3/4" FNPT molded in end	large raised opening, flat bottom
45 gallon rectangle	SP0045-AS	23"	18"	37"	18"	5"	none	flat bottom
15 gallon leg tank	FM0015-14		14"	30"	14"	5"	3/4" FNPT bulkhead	sump in bottom center